


Socket Purge Caps

Produced to ASTM D2513/D2683

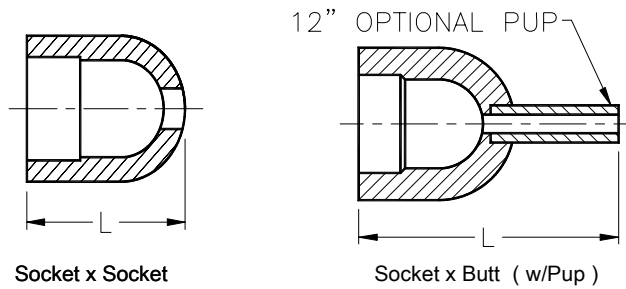

<u>Socket Purge Caps</u>	<u>CSA</u> ¹	<u>Dimension L (in)</u>	<u>Package Quantity</u>	<u>Package Weight (lbs.)</u>	<u>Reference Number</u>
2" IPS x 1/2" CTS	X	16.25"	10	3.7	Socket x Socket *65M*x*SPC*
2" IPS x 1/2" IPS					
2" IPS x 3/4" IPS					
2" IPS x 1" CTS					
3" IPS x 1/2" CTS	X	15.94"	10	11.0	
3" IPS x 1/2" IPS					
3" IPS x 3/4" IPS					
3" IPS x 1" CTS					
4" IPS x 1/2" CTS	X	16.25"	10	22.0	Socket x Butt (w/pup) *65F*x*SPC*
4" IPS x 1/2" IPS					
4" IPS x 3/4" IPS					
4" IPS x 1" CTS					

¹ - CSA and IAPMO available as DriscoPlex® 6500 MDPE materials ONLY.
- Drawing No. CU70B366

Special precautions are necessary when working in gaseous environments or elevated temperatures. Consult your Operations and Safety Manuals for specific recommendations. The use of these tapping tees and cutters beyond this scope is at the user's own risk.